

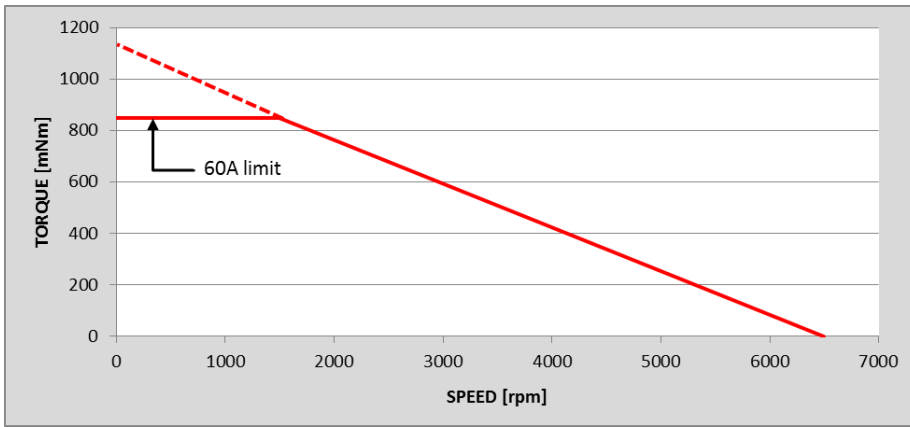


► Dynamic characteristics



► Electrical Interface and commutation sequence

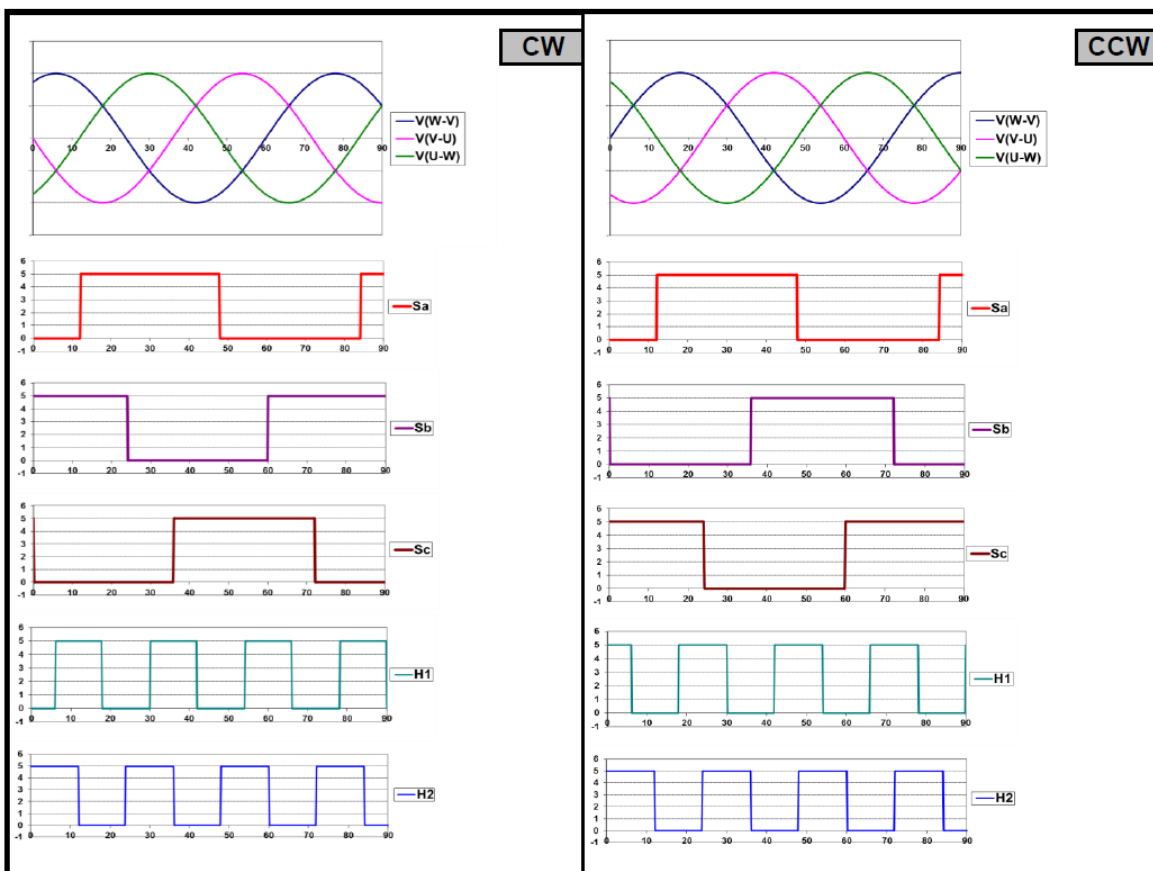

PIN OUT	
PIN	CONFIGURATION
1	FREE
2	SB
3	H1
4	SC
5	W
6	V
7	U
8	H2
9	SA
10	GND
11	SUPPLY

► Operating Conditions

Temperature range -40°C/140°C
 Vibration level..... Up to 18g – bandwidth 0-2000Hz

Nota: Overall specifications depend on sensor options and driving duty cycles.

Special requirements upon customer specifications. Right to change without notifications reserved

<2.0>

SONCEBOZ SA

2605 Sonceboz – Switzerland

Tel. +41(0) 32 488 11 11

Fax +41(0) 32 488 11 00

info@sonceboz.com - www.sonceboz.com

